

DocuCentre-V 3065 / 3060 / 2060



DocuCentre-V 3065 / 3060 / 2060

Easy to Operate, Easy to Collaborate

FUJI XEROX 



A compact multifunction device saving work, space, and cost.

Based on the foundation of solid basic functions, the functionality of the DocuCentre-V 3065 / 3060 / 2060 can be enhanced to suit your work style. Excellent noise-free environmental performance is provided in addition to easy-to-use operability and visibility. Includes a variety of features that increase efficiency of day-to-day operations and reduce cost. The birth of a dependable monochrome multifunction device that supports operations within a small office.

| | | | |
|---|--|--|---|
| <div style="background-color: #4CAF50; color: white; padding: 5px; border-radius: 10px; display: inline-block;">Copy</div> <div style="display: flex; justify-content: space-around; width: 100%;"> 3065 3060 2060 </div> <div style="display: flex; justify-content: space-around; width: 100%; font-size: 24px; font-weight: bold;"> 35 30 25 </div> <div style="text-align: center; font-size: 12px;">ppm*1</div> | <div style="background-color: #4CAF50; color: white; padding: 5px; border-radius: 10px; display: inline-block;">Print</div> <div style="display: flex; justify-content: space-around; width: 100%;"> 3065 3060 2060 </div> <div style="display: flex; justify-content: space-around; width: 100%; font-size: 24px; font-weight: bold;"> 35 30 25 </div> <div style="text-align: center; font-size: 12px;">ppm*1</div> | <div style="background-color: #4CAF50; color: white; padding: 5px; border-radius: 10px; display: inline-block;">Fax</div> <div style="font-size: 24px; font-weight: bold;">Super G3 Supported</div> | <div style="background-color: #4CAF50; color: white; padding: 5px; border-radius: 10px; display: inline-block;">Scan</div> <div style="font-size: 12px;">B / W, Colour</div> <div style="font-size: 24px; font-weight: bold;">55</div> <div style="font-size: 12px;">ppm*2</div> |
|---|--|--|---|

*1: A4 LEF
 *2: Fuji Xerox Standard Paper (A4 LEF) 200dpi, to Folder.

● : Standard ○ : Optional

| | Copy | Print | Fax | Scan | DADF |
|----------|------|-------|-----|------|------|
| Model-DC | ● | ○ | ○ | ○ | ● |
| Model-CP | ● | ● | ○ | ○ | ● |



* The picture shows the multifunction device with options: Side Tray and Fax Kit.

DocuCentre-V 3065 / 3060 / 2060

A variety of options with a variety of combinations.
Flexibly adapting to any installation space.



Optional Functions



1 Finisher-A1
Staple



2 Finisher-B1
Staple 2-hole punch



3 Booklet Maker Unit for
Finisher B1
Staple 2-hole punch+saddle staple



4 1 Tray Module



5 1 Tray Module with Cabinet



6 3 Tray module

Convenient inner output tray, bypass tray that can be used to print on envelope



The inner output tray and optional side tray allow you to switch output trays for copy, fax, and print jobs.



The bypass tray is convenient for printing on envelopes used when sending delivery notes and invoices.

More efficient use of multifunction device



Easy Fingertip Control.

The new DocuCentre-V series take advantage of technology seen in smartphones and tablets by enabling users to operate the devices intuitively, for faster and more efficient production. Four different gestures – tap, double-tap, drag and flick – can be used to scroll and switch functions smoothly and quickly.

* Pinch in and pinch out operations (zooming in/out with two fingers) are not supported.

Clear printout

Faithfully reproduce detailed figures in high-quality 1200 x 1200 dpi resolution.

Faster scan

A monochrome multifunction device equipped with high speed colour scanner. Large volume paper documents can be turned into electronic form easily with the use of Duplex Automatic Document Feeder.



Scan data can be converted to DocuWorks document or PDF when sending as e-mail or storing in PC. Also available are functions such as OCR* useful for search, compression to reduce communication load, and password to provide security. Scanned data can be saved directly to USB memory.

* Optional.

Two easy-to-use scan applications are available


Scan Auto (personal use)

Automatically send scanned file to yourself. No need to worry about setting because scan settings are automated.



By task Scan Delivery (group use)*



Press a button specific to the type of document and send the scanned file to the specified storage destination. The administrator configures in advance so there is no need to configure individually.



* Optional.

Easy operation from “Simple” windows


“Simple Copy” and “Simple Fax” windows are available to easy operation. This operation by showing only the basic settings. Easier to read with 5 mm font.

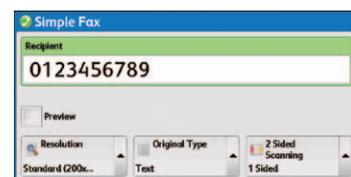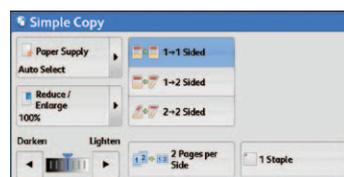

Waste-free fax

[Reception]

Received fax documents are stored in a folder and you can view their thumbnails to print only the necessary documents. This reduces unnecessary print out. Once a fax is stored in a folder, you can send it by mail or transfer it to a shared folder in addition to printing. You can even check the content of your fax on your smartphone while on the go.

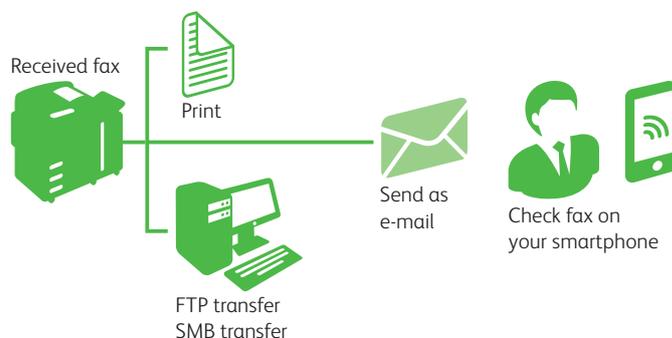

[Sending]

Direct Fax (sending fax directly from PC) can also be used. Sent fax documents can also be saved as PDF and sent as e-mail attachments.

[Reject]

Allows administrators to block incoming faxes from certain numbers and anonymous numbers.

Supports secure and waste-free output

Print jobs are stored in the storage device of the multifunction device and output only after authenticating. This prevents uncollected print output and print error. You can also set the number of copies or change the print settings such as from 2 to 1 sided or color to monochrome mode during output. Thus reducing error, waste, and TCO.

* Requires use of authenticate mode.

Authentication using IC card


The authentication function can be used to restrict unauthorized users from accessing the multifunction device. You can also check each user's usage from the job log. Authentication using an IC card is also possible by adding an IC card reader to the multifunction device.

Efficiently utilize multiple multifunction devices

Printable from Any Machine on Demand

After a job has been sent to the device, users can choose the "Server-less On-demand" feature to print it from any machine on the network on demand, simply by logging on to the machine. Even if the selected device is in use, users can choose their job from another machine and print it. No dedicated server is required for this feature. It is also possible to use up to five devices in this way by grouping them – for example, by floor or workgroup.

* Optional.

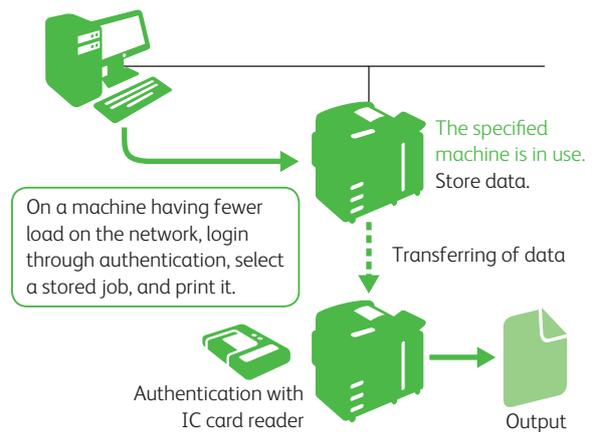

Easy printing wherever you are

Print Utility for iOS / Android

This free Fuji Xerox application lets you output web pages, pictures, DocuWorks and PDF documents^{*1}, and import scanned documents to mobile devices. You can configure it to print N-up and duplex. Server-less On-demand printing^{*2} is also available by assigning authentication information. Additionally, the application is supported by standard printing frameworks on Android™ OS 4.4 or later. More applications allow output using Print Utility for Android.

* Print Utility can be downloaded for free from the App Store (iOS) or Google Play™ (Android).

*1: Outputting DocuWorks and PDF documents requires DocuWorks Viewer Light for iPhone/iPad or DocuWorks Viewer Light for Android.

*2: Optional.

Google Cloud Print

By registering the multi-function device with Google Cloud Print, you can output documents via the cloud from Android™ devices, Chromebook™ and computers. Giving permission to office visitors provides them with a printing environment without connecting to your Intranet.

* Google Cloud Print is a web printing service from Google.



Wi-Fi Direct®

Wi-Fi Direct® can be used with a wireless LAN adaptor. You can connect personal mobile devices directly to the multifunction device then print. Using a wireless LAN access point allows you to separate connections from business mobile devices and computers on an Intranet.

* Optional.

AirPrint

Supports AirPrint, iOS and OS X standard print functions. You can output e-mails and documents created with Apple applications, including Safari, Map, Numbers, Pages and Keynote, and Microsoft applications such as Word, Excel and PowerPoint.



Mopria® Print

You can output on a Mopria-certified device from Mopria Print Service* installed on mobile devices without installing different printing applications of models or manufacturers.

* Mopria Print Service can be downloaded for free from Google Play™. (Android™ 4.4 or later)



Environmentally responsible

Excellent noise reduction performance through airflow design

Natural convection is used in addition to reducing the number of cooling fans and the fan is stopped completely during standby. This enables energy-saving and ultra-low noise during standby (3.3B¹). Also, the 6.7B² noise level during operation is hardly noticeable enabling installation on top or side of a desk with no problem.

* For DocuCentre-V 2060

*1: A-weighted sound power level (LwAd), A-weighted emission sound pressure level (LpAm) is 16dB. Measurement is ISO7779.

*2: A-weighted sound power level (LwAd), emission sound pressure level (LpAm) is 49dB. Measurement is ISO7779.

Using environmentally safe new materials

Facing the challenges of modern society such as global warming, petroleum resource depletion and food problem, Fuji Xerox is engaged in the research and development of environment friendly cellulosic bio-based plastics. The newly developed “woody non-edible biomass plastics” has more strength and flame resistance compared with the conventional petroleum-based plastics and enables reduction of CO₂ emissions. It is adopted also for some parts of new products.

“Smart Energy Management” for Specific Power Use

Power consumption and CO₂ emissions are reduced by supplying power only to the portion to be used depending on the used functions. For example, during scanning or fax transmission, no power is supplied to unnecessary output device.



Quickly reverting operation panel


The control panel becomes available about 3 seconds after pressing the power save button. Promoting environmental awareness without special consideration.

Energy-saving design consuming less than 0.8 W* power during sleep mode

The newly adopted low-power controller and fax boards significantly improve power consumption during sleep. Energy efficiency is increased.

* For DC model

Sleep mode power consumption comparison (unit: W)

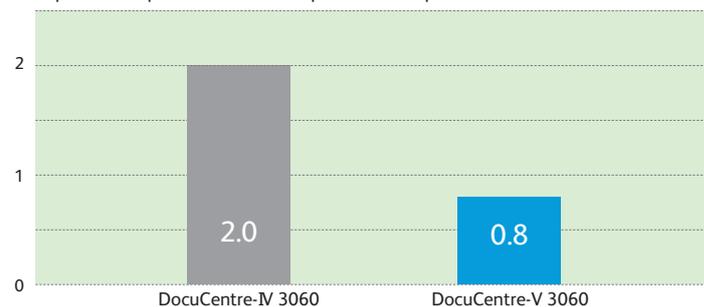


Cloud service connecting directly to the multifunction device

Directly accessible from the multifunction device linking with the Fuji Xerox's cloud service “Working Folder.” You can transfer scanned documents and received fax documents, and also output saved document. In addition to editing documents on the cloud in DocuWorks Desk, you can also view and edit them from your smartphone.

* Agreement to use the Working Folder service is necessary in order to use this function.


Quickly check received fax on the go

Automatically upload received fax to the Working Folder.

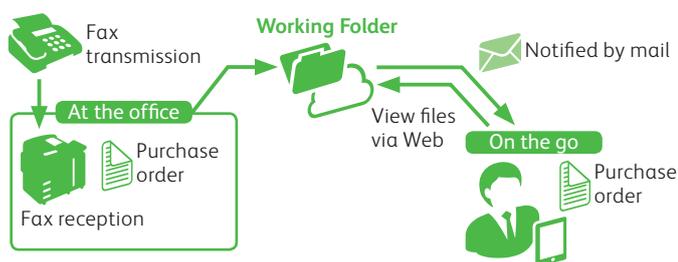

Efficiently perform business activities on the road through mobile coordination

Documents in the Working Folder can be accessed even from a smartphone or tablet.

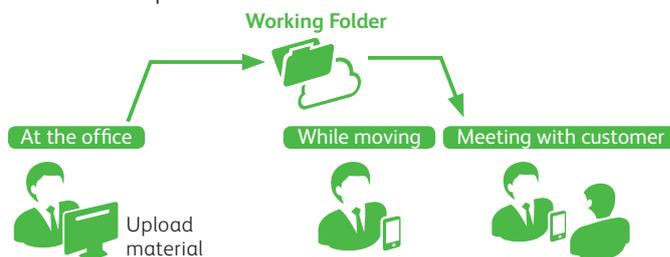

Specifications of DocuCentre-V 3065 / 3060 / 2060

Basic Specifications/Copy Function

| Item | DocuCentre-V 3065 | DocuCentre-V 3060 | DocuCentre-V 2060 | |
|---------------------------|---|---|--|--------|
| Type | Desktop / Console | | | |
| Memory capacity | 4 GB (Max: 4 GB) | | | |
| Hard disk capacity*1 | Optional: 160 GB or larger (Usable space: 128 GB) | | | |
| Scan Resolution | 600 x 600 dpi | | | |
| Printing Resolution | 1200 x 1200 dpi | | | |
| Warm-up Time | 32 seconds or less, 14 seconds*2 or less if the main power is on (At room temperature 23°C) | | | |
| Original Size | Maximum of 297 x 432 mm (A3, 11 x 17") for both Sheet and Book | | | |
| Paper Size | Max | A3, 11 x 17" | | |
| | Min | A5 [Postcard (100 x 148 mm) and Envelope Monarch (191 x 98 mm) when using Bypass Tray] | | |
| | Image loss width | Lead Edge 4.0 mm, Trail Edge 2.0 mm, Right & Left Edges 2.0 mm | | |
| Paper Weight*3 | Paper Tray | 60 to 256 gsm | | |
| | Bypass Tray | 60 to 216 gsm | | |
| First Copy Output Time | 4.5 sec. (A4 LEF) | | | |
| Continuous Copy Speed*4 | A4 LEF / B5 LEF | 35 ppm | 30 ppm | 25 ppm |
| | A4 | 26 ppm | 23 ppm | 19 ppm |
| | B5 | 13 ppm | 13 ppm | 11 ppm |
| | B4 | 22 ppm | 20 ppm | 16 ppm |
| Paper Tray Capacity*5 | Standard | 500 sheets x 1-tray + Bypass Tray 96 sheets | | |
| | Optional | 1 Tray Module / 1 Tray Module with Cabinet: 500 sheets x 1-tray 3 Tray Module: 500 sheets x 3-tray | | |
| | Max | 2096 sheets [Standard + 3 Tray Module] | | |
| Output Tray Capacity*6 | Upper Center: 250 sheets (A4 LEF), Lower Center: 250 sheets (A4 LEF) | | | |
| Power Supply | AC220-240 V +/- 10 %, 8 A, 50/60 Hz common | | | |
| Maximum Power Consumption | 1.76 kW or less (AC220 V +/- 10 %) | 1.76 kW or less (AC220 V +/- 10 %) | 1.76 kW or less (AC220 V +/- 10 %) | |
| | 1.92 kW or less (AC240 V +/- 10 %) | 1.92 kW or less (AC240 V +/- 10 %) | 1.92 kW or less (AC240 V +/- 10 %) | |
| | Sleep Mode: CP: 1.0 W or less (AC230 V +/- 10 %) | Sleep Mode: CP: 1.0 W or less (AC230 V +/- 10 %) | Sleep Mode: CP: 1.0 W or less (AC230 V +/- 10 %) | |
| | DC: 0.8 W or less (AC230 V +/- 10 %) | DC: 0.8 W or less (AC230 V +/- 10 %) | Ready Mode: 82 W or less | |
| Dimensions | W 590 x D 659 x H 768 mm | | | |
| | W 590 x D 659 x H 882 mm (when optional 1 Tray Module is installed.) | | | |
| | W 616 x D 659 x H 1119 mm (when optional 1 Tray Module with cabinet is installed.) | | | |
| | W 616 x D 659 x H 1119 mm (when optional 3 Tray Module is installed.) | | | |
| Weight*7 | 48 kg | | | |
| | 59 kg (when optional 1 Tray Module is installed.) | | | |
| | 73 kg (when optional 1 Tray Module with cabinet is installed.) | | | |
| | 75 kg (when optional 3 Tray Module is installed.) | | | |

*1: The Storage Hard disk or other storage media capacity is not totally available for customers. *2: For DC model. It is 18 seconds in CP model and 23 seconds when HDD is installed. *3: It is recommended to use Fuji Xerox recommended paper. Correct print output may not be possible depending on the requirement. *4: The speed may be reduced due to the image quality adjustment. *5: 80 gsm paper. *6: 64 gsm paper. *7: Excluding Toner Cartridge.

Print Function (Optional)

| Item | Description |
|----------------------------|--|
| Type | Built-in type |
| Continuous Print Speed*1 | Same as the Basic Specifications / Copy Function |
| Printing Resolution | 600 x 600 dpi, 1200 x 1200 dpi |
| Page Description Language | Standard PCL5 / PCL6 |
| | Optional Adobe® PostScript® 3™ |
| Supported Operating System | Standard (PCL Driver) Windows 10 (32bit/64bit), Windows 8.1 (32bit/64bit) Windows 8 (32bit/64bit), Windows 7 (32bit/64bit) Windows Vista (32bit/64bit), Windows Server 2019 (64bit) Windows Server 2016 (64bit), Windows Server 2012 R2 (64bit) Windows Server 2012 (64bit), Windows Server 2008 R2 (64bit) Windows Server 2008 (32bit/64bit), Windows Server 2003 (32bit/64bit) |
| | Standard (Mac OS X Driver) macOS 10.14/10.13/10.12, OS X 10.11/10.10/10.9/10.8, Mac OS X 10.7/10.6/10.5 |
| | Optional (Adobe® PostScript® 3™ Driver) Windows 10 (32bit/64bit), Windows 8.1 (32bit/64bit) Windows 8 (32bit/64bit), Windows 7 (32bit/64bit) Windows Vista (32bit/64bit), Windows Server 2019 (64bit) Windows Server 2016 (64bit), Windows Server 2012 R2 (64bit) Windows Server 2012 (64bit), Windows Server 2008 R2 (64bit) Windows Server 2008 (32bit/64bit), Windows Server 2003 (32bit/64bit) macOS 10.14/10.13/10.12, OS X 10.11/10.10/10.9/10.8, Mac OS X 10.7/10.6/10.5 |
| Interface | Standard Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T, USB2.0 |

*1: The speed may be reduced due to the image quality adjustment. The printing speed may be reduced depending on the document.

Side Tray (Optional)

| Item | Description |
|------------------|--------------------------|
| Paper Capacity*1 | 100 sheets |
| Dimensions | W 353 x D 429 x H 198 mm |

*1: 64 gsm paper.

Scan Function (Optional)

| Item | Description |
|-----------------|---|
| Type | Colour Scanner |
| Scan Resolution | 600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 200 dpi |
| Scan Speed*1 | Duplex Automatic Document Feeder B/W: 55 ppm, Colour: 55 ppm [Fuji Xerox Standard Paper (A4 LEF), 200dpi, to Folder.] |
| Interface | Standard Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T |

*1: The scanning speed varies depending on the documents.

Fax Function (Optional)

| Item | Description |
|----------------------|---|
| Original Size | Max: A3, 11 x 17", Long document (Longest 600 mm) |
| Recording Paper Size | Max: A3, 11 x 17" Min: A5 |
| Transmission Time | 2 seconds and more but fewer than 3 seconds*1 |
| Transmission Mode | ITU-T G3 |
| Applicable Lines | Telephone subscriber line, PBX, Fax communication (PSTN), Maximum 3 ports*2 (G3-3 ports) |

*1: When A4 size document with approximately 700 characters is transmitted in standard image-quality (8 x 3.85 lines / mm) and in high-speed mode (28.8 kbps or faster, JBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the contents of the document, the type of machine receiving the fax, and line condition. *2: No. of FAX lines is up to 3 ports. Port refers to number of channels for FAX.

Duplex Automatic Document Feeder

| Item | DocuCentre-V 3065 | DocuCentre-V 3060 | DocuCentre-V 2060 |
|--------------------------------|--|-------------------|-------------------|
| Original Size | Max: A3, 11 x 17" Min: A5 *1 | | |
| Paper Weight | 38 to 128 gsm (In Duplex: 50 to 128 gsm) | | |
| Capacity*2 | 110 sheets | | |
| Feeding Speed (A4 LEF Simplex) | 35 ppm | 30 ppm | 25 ppm |

*1: The minimum custom size is 125 x 85 mm. *2: 64 gsm paper.

Finisher-A1 (Optional)

| Item | Description |
|------------------|---|
| Type | Sort (Offset available) / Stack (Offset available) |
| Paper Size | Max: A3, 11 x 17" Min: Postcard (100 x 148 mm) |
| Paper Weight | 60 to 220 gsm |
| Paper Capacity*1 | Finishing Tray [Without Stapling] A4: 500 sheets, B4: 250 sheets, A3 or larger: 200 sheets, Mixed Size Stacking*2 : 250 sheets [With Stapling] 30 sets |
| | Capacity A4: 50 sheets (90 gsm or less) B4 or larger: 30 sheets (90 gsm or less) |
| Staple | Paper Size Max: A3, 11 x 17" Min: B5 LEF |
| | Position Single stapling |
| Dimensions | W 559 x D 448 x H 246 mm |
| Weight | 12 kg |

*1: 64 gsm paper. *2: When larger size sheets are stacked on top of smaller size sheets.

Finisher-B1 (Optional)

| Item | Description |
|---------------------|---|
| Type | Sort (Offset available) / Stack (Offset available) |
| Paper Size*1 | Max: A3, 11 x 17" Min: B5 LEF |
| Paper Weight | 60 to 220 gsm |
| Paper Capacity*2 | [Without Stapling] A4: 2000 sheets, B4 or larger: 1000 sheets, Mixed Size Stacking*3 : 300 sheets [With Stapling] A4: 100 sets or 1000 sheets*4 , B4 or larger: 75 sets or 750 sheets [With Booklet Finishing*5] 50 sets or 600 sheets [With Scoring*5] 500 sheets |
| | Capacity 50 sheets (90 gsm or less) |
| Staple | Paper Size Max: A3, 11 x 17" Min: B5 LEF |
| | Position Single stapling or Dual stapling |
| Punch*6 | Number of Holes 2-hole / 4-hole punch or 2-hole / 3-hole punch (US Specifications) |
| | Paper Size A3, 11 x 17", B4, A4*7, A4 LEF, Letter*7, Letter LEF, B5 LEF |
| Booklet Finishing*5 | Paper Weight 60 to 200 gsm |
| | Capacity Saddle Staple: 15 sheets, Scoring: 5 sheets |
| Dimensions | Paper Size Max: A3, 11 x 17" Min: A4, Letter |
| | Paper Weight Saddle Staple: 64 to 80 gsm, Scoring: 64 to 105 gsm |
| Dimensions | W 657 x D 552 x H 1011 mm, With Booklet Finisher: W 657 x D 597 x H 1081 mm |
| Weight | 28 kg, With Booklet Finisher: 37 kg |

Note: Finisher-B1 is available only when optional 1Tray Module with Cabinet or 3 Tray Module is attached to Main Unit. *1: Paper size is smaller than B5, and larger than A3, 11 x 17" can be output from the Center Tray. *2: 64 gsm paper. *3: When larger size sheets are stacked on top of smaller size sheets. *4: 75 sets or 750 sheets with dual stapling. *5: The Booklet Finishing function requires the optional Finisher-B1 Booklet unit. After a job with the Booklet Finishing function specified has been output, the next job may not be delivered until the sheets are removed from the output tray. Also, if larger size sheets are stacked on top of smaller size sheets after a job with the Booklet Finishing function specified has been run, the next job may not be delivered until the sheets are removed from the output tray. *6: The Punch function requires the optional Finisher-B1 Punch unit for 2-hole / 4-hole punch or Finisher-B1 Punch unit for 2-hole / 3-hole punch (US Specifications). *7: 3-hole punch is not applicable.

Notes

- 1) If the storage media (such as hard disk drives) of the base unit fail, loss of received data, accumulated data, registered setting data, etc. may occur. In no event shall Fuji Xerox be liable for any damages whatsoever arising from loss of data.
- 2) Functional spare parts will be available for at least 7 years after the product is no longer manufactured.

All product names and company names mentioned in this brochure are trademarks or registered trademarks of their respective companies. The product specifications, appearance and other details in this brochure are subject to change without notice for improvements.

Reproduction Prohibitions Please note that reproduction of the following is prohibited by law : Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates. Unused postage stamps, post cards, etc. Certificate stamps stipulated by law. Reproducing works forming the subject matter of copyright (literary works, musical works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.



Adobe PostScript[®] 3



For Your Safety

Before using the product, read the Instruction Manual carefully for proper use. Use the product with the power source and voltage specified. Be sure to establish ground connection. Otherwise, electronic shock may result in the case of a failure or short circuit.

For more information or detailed product specification, please call or visit us at

Fuji Xerox Australia Pty. Ltd.

8 Khartoum Road MACQUARIE PARK NSW 2113 Australia

Tel. +61 2 9856 5000

<https://www.fujixerox.com.au/>

